

కార్యనిర్వహణాధికారి వారి కార్యాలయము,  
శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి  
వారి దేవస్థానము,  
రంగంపేట గాంచుము మరియు మండలం,  
తూర్పు గోదావరి జిల్లా.

**లేఖ నంఖ్య Nil/2024, తేదీ.10.08.2024.**

శ్రీయుత జిల్లా దేవాదాయ శాఖాధికారి వారికి,  
దేవదాయ ధర్మదాయ శాఖ,  
తూర్పు గోదావరి జిల్లా,  
రాజమహెంద్రవరం.

అయ్య

**విషయము:** దేవదాయ ధర్మదాయ శాఖ - శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వారి దేవస్థానము, రంగంపేట గాంచుము మరియు మండలము, తూర్పు గోదావరి జిల్లా - శ్రీ స్వామి వార్డు దేవాలయము పునఃనిర్మాణము పనులను సి.జి.ఎఫ్. నిధులతో చేయస్తున్నందున - సదరు పనులకు సంబంధించి ఇంజనీరింగు విభాగము వారు తయారు చేసిన ప్లాటము, ఎస్టీమేట్లు ఇందుతో జతపరిచి తమకు సమర్పించుకొనుచూ - సదరు పనులకు అవసరమైన ఎస్టీమేటు ఖర్చు రూ.2,00,00,000/-ల నిధులను సి.జి.ఎఫ్. గాగంటు నుండి ఇప్పుంచెలందులకు గాను శ్రీయుత కమీషనరు, దేవాదాయ ధర్మదాయ శాఖ, ఆంధ్రప్రదేశ్ వారికి సిఫారసు చేయ గలందులకు గాను తమను కోరుట గూర్చి - నివేదిక సమర్పితము.

**సూచిక:**

1. గౌరవ దేవదాయ ధర్మదాయ శాఖ మాత్రములు వారిచే జరిగిన సమీక్ష సమావేశము ది.01.08.2024 మేరకు.
2. శ్రీయుత ఉప కార్యనిర్వహక ఇంజనీరు, దేవాదాయ ధర్మదాయ శాఖ, కాకినాడ వారి ఉత్తర్వులు Rc.No.D2/265/2024, ది.04.08.2024 మేరకు.

\*\*\*

దేవదాయ ధర్మదాయ శాఖ, తూర్పు గోదావరి జిల్లా, రంగంపేట మండలము, రంగంపేట గాంచుము నందు వేంచేసియున్న శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వారి దేవస్థానము 6(C)(ii) గా పట్టివ్వ కాబడి, తమ యొక్క పరిపొలనా పరిధిలో కలదు. సదరు దేవస్థానమునక పి.పిగ్యాంక అను నేను గేణ్-I కార్యనిర్వహణాధికారిగా వ్యవహరించుచున్నాను. శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వార్లు అత్యంత మహిమాన్వితులై వెలుగొందుచున్నందున, సుమారు 160 సంవత్సరాల పైబడిన దేవాలయము అయినందున, గాంచుమ్మలు మాత్రమే కాకుండా చుట్టూ ప్రక్కల గాంచుమ్మలు, సుదూర పాంచముల నుండి కూడా అధిక సంఖ్యలో భక్తులు విచ్చేసి శ్రీ స్వామి వారిని, అమృతార్థాను దర్శించుకుందురు.

ఇందున తమకు మనవి చేయునది ఏమనగా శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వార్ల దేవస్థానము పురాతనమైన దేవస్థానము అయినందున, చుట్టూప్రక్కల మరెక్కడా సుబ్రహ్మణ్య స్వామి వారి ఆలయము లేనందున, ఇచ్చుట సుబ్రహ్మణ్య సమై ఉత్సవములు సందర్భంగా శ్రీ స్వామి వారి దర్శనార్థం వేల సంఖ్యలో భక్తులు వచ్చి దర్శించుకుందురు.

శ్రీ స్వామి వారి దేవస్తానము సుమారు 160 సంవత్సరముల పైబడినది అయినందున, శ్రీ స్వామి వారి ఆలయము రోడ్చు కన్నా కీండకు ఉన్నందున, అంతరాలయములు, గర్జాలయములు కూడా ఇంకా కీండకు ఉన్నందున, వర్షం నీరు వగ్గెరాలు ఆలయములోకి పచ్చి చేరుతున్నందున శ్రీ స్వామి వారి దేవస్తానమును పునఃనిర్మించవలసిన అవశ్యకత యున్నది.

సూతన పూజుత్వము ఏర్పాటు అయిన అనంతరము అనపర్చి నియోజకవర్గ శాసన సభ్యులుగా ఎన్నిక కాబడిన గౌరవనీయులు శ్రీ నల్లమిల్లి రామ కృష్ణారెడ్డి గారు రంగంపేట గ్రామంలో పర్యాచీంచిన సందర్భములోను మరియు తదుపరి ది.28.06.2024వ తేదీన అనపర్చి నందు దేవదాయ ధర్మదాయ శాఖ ఉన్నతాధికారులతో, అనపర్చి నియోజకవర్గములో గల దేవాలయములు మరియు సత్కముల యొక్క కార్యనిర్వహణాధికారులతోను, వివిధ గ్రామములకు చెందిన నాయకులతోను, గ్రామస్థులతోను జరుపబడిన సమీక్ష సమావేశము నందు ఆలయములు మరియు సత్కముల అభివృద్ధి గూర్చి చర్చకు పచ్చిన అంశములలో భాగంగా రంగంపేట గ్రామస్థులు శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వారి దేవస్తానమును పునఃనిర్మాణము చేయమని కోరిన విషయములో స్పందించిన గౌరవ శాసన సభ్యులు శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వారి దేవస్తానమును పునఃనిర్మాణము నిమిత్తము అవసరమైన ప్లాస్టిక్ తయారు చేయ వలసినదిగా ఇంజనీరింగు అధికారులను ఆదేశించి యున్నారు.


తదుపరి ది.01.08.2024న గౌరవ దేవదాయ శాఖా మాత్రుల వారు అనపర్చి నియోజక వర్గ పర్యాటనలో భాగంగా అనపర్చి నియోజకవర్గ శాసన సభ్యులైన గౌరవనీయులు శ్రీ నల్లమిల్లి రామ కృష్ణారెడ్డి గారు శ్రీ రామలింగేశ్వర & సుబ్రహ్మణ్యేశ్వర స్వామి వారి దేవస్తానమును పునఃనిర్మాణము నిమిత్తము అవసరమైన రూ.2,00,00,000/-ల సి.జి.ఎఫ్. నిధులను ఇప్పించవలసినదిగా గౌరవ మంత్రి పర్యుల వారికి సిఫారసు చేయగా, అందుపై మంత్రిపర్యుల ఆదేశముల మేరకు పై సూచిక 2 దాఖలా ఇంజనీరింగు విభాగము వారు ప్లాస్టిక్, లైను ఎస్టీమేట్లను తయారు చేసి యున్నారు. నదరు ప్లాస్టిక్, లైను ఎస్టీమేట్లను ఇందుతో జతపరిచి తమకు సమర్పించుకొనుచున్నాను.

కాపున ఏలిన వారు సదరు పై విషయములను పరిశీలించి, తూర్పు గోదావరి జిల్లా, రంగంపేట మండలము, రంగంపేట గ్రామము నందు వేంచేసియున్న శ్రీ రామలింగేశ్వర & శ్రీ సుబ్రహ్మణ్యేశ్వర స్వామి వారి దేవస్తానమును పునఃనిర్మాణము చేయు నిమిత్తము అవసరమైన రూ.2,00,00,000/-ల నిధులను సి.జి.ఎఫ్ గ్రాంటుగా ఇప్పించగలందులకు తమను కోరుచూ, నదరు నిధుల మంజూరు నిమిత్తము శ్రీయుత కమీషనరు, దేవదాయ ధర్మదాయ శాఖ, ఆంధ్రపూదీశ్వర, గోల్కట్టాడి, విజయవాడ వారికి సిఫారసు చేయ వలసినదిగా తమను కోరి పొర్చించుచున్నాను.

జతపరిచినవి:

ప్లాస్టిక్, ఎస్టీమేట్లు మరియు ఫోటోలు

ఇంట్లు,  
తమ విస్యునీయ,

P. R.   
(పి.పి.యాంక)

కార్యనిర్వహణాధికారి, గేడ్-I,  
శ్రీ రామలింగేశ్వర & శ్రీ సుబ్రహ్మణ్యేశ్వర  
స్వామి వారి దేవస్తానము,  
రంగంపేట గ్రామము మరియు మండలము,  
తూర్పు గోదావరి జిల్లా.

Office of the Dy. Executive Engineer,  
Endowments Department, Kakinada.

Rc.No.D2/265 /2024, Dated: -08-2024

**Sub:-** Endowments Department - Sri Uma Ramalingeswara and Sri Subrahmaneswara Swamy Temple, Ramgampeta(V&M), East Godavari District - Reconstruction of Temple – Line estimate & plans- Regarding.

**Ref:-** Meeting dated:01-08-2024 by the Hon'ble Minister of Endowments.

\*\*\*\*\*

I invite your kind attention to the reference cited, where in the Hon'ble Minister for Endowments was pleased to instructed to prepare plans & estimates after conducting the review meeting for Reconstruction of Temple of above subject temple.

Accordingly, the plans and line estimates are prepared and forward the same and requested to submit the same to the District Endowments Officer/ Assistant Commissioner, Endowments Department, Rajamahendravaram duly enclosing CGF proposals for getting aid from CGF.

**Encl:** Line estimates & Plans

  
4/8/24  
**DEPUTY EXECUTIVE ENGINEER**

To

The Executive Officer of the subject temple

Copy submitted to the Regional Joint Commissioner, Endowments Department, Rajamahendravaram for favour of information.

Copy submitted to the Executive Engineer, Endowments Department, Kakinada for favour of information.

Copy submitted to the Deputy Commissioner, Endowments Department, Kakinada for favour of information.


Copy submitted to the District Endowments Officer, Rajamahendravaram for favour of information.


## ABSTRACT

**Name of the Work:** Reconstruction of Sri Uma Ramalingeswara Swamy temple and Sri Subrahmanyeswara Swamy Temple

**Name of the Temple:** Sri Umaramalingeswara and Sri Subrahmanyeswara Swamy temple at Ramgampet (V),&(M),East Godavari Dist.

Sl. No.	Description of work	Amount
1	Reconstruction of temple	11,122,587.00
2	Reconstruction of Mukhamandapam	2,296,200.00
3	Re erection of Dwajastambham	563,940.00
4	Reconstruction of Homasala	270,424.00
5	Reconstruction of Kalyanamandapam	299,919.00
6	reconst of Prakaram wall	1,367,888.00
7	Providing raising of ground level and providing pradakshanachapta	1,480,048.00
		<b>17,401,006.00</b>
8	Provision for G.ST @ 18%	3,132,181.00
9	Add P.S and contingencies charges @ 3%	522,030.00
10	Provision for Seigniorage Charges @ 1%	174,010.00
11	Provision for Paper Publication and Quality Control Test	70,000.00
12	Unforcen item and fluctuation of market rates	200,773.00
	Total:	<b>21,500,000.00</b>

  
**Assistant Engineer,**  
**Endowmnts Department,**  
**KAKINADA**

  
**Deputy Executive Engineer,**  
**Endowmnts Department,**  
**KAKINADA**


**LINE ESTIMATE**

**Name of the Work :** Re construction of Sri Parvathi Ramalingeswara Swamy temple

**Name of the Temple:** Sri Umaramalingeswara and Sri Subrahmanyeswara Swamy temple at Ramgampet  
**(V),&(M),East Godavari Dist.**

Sl. No.	Description of work	No.	MEASUREMENTS			Contents	Rate per	Amount
			Length	Breadth	Depth			
1	Reconstruction of Swamy Temple duly providing open foundation with sufficient depth by providing VCC footings which over proposed with Granite cut stone vargams from Chitravanam to Prastharam level with roof stones and then proposed with Ornamental Brick work from Karnakootam to Sikharan level using 2nd class bricks and to provide ornamental plastering as per required specification and provide necessary plastering to inside of temple, supply and fixing of hard granite cut stone door frames, somasutram, Best teak wood ornamental door shutter with padmams and providing flooring with polished Granite Tiles with necessary paintings etc., complete.							
	Sri Uma Ramalingeswara S.t	1	1	11.69	11.69	34.33	4691.40	
	Ardhamandapam	1	1	11.69	8.79	16.30	1674.91	
	Sri Subrahmanyeswara S.T.	1	1	11.69	11.69	34.33	4691.40	
	Ardhamandapam	1	1	11.69	8.79	16.30	1674.91	
	Sri Veerabhadra S.t	1	1	8.79	8.79	21.97	1697.49	
							<b>14430.12</b>	750.00
							Cft	1Cft
2	Provision for Dismantling charges						LS	300000.00
							<b>Total:</b>	<b>11122587.00</b>

  
Assistant Engineer,  
Endowments Department,  
Kakinada

  
4/8/14  
Deputy Executive Engineer,  
Endowments Department,  
Kakinada

**LINE ESTIMATE**

**Name of the Work :** Reconstruction of Mukhamandapam

**Name of the Temple: Sri Umaramalingeswara and Sri Subrahmanyeswara Swamy temple at Ramgampet  
(V),&(M),East Godavari Dist.**

Assistant Engineer,  
Endowmnts Department,  
KAKINADA

Deputy Executive Engineer,  
Endowmnts Department,  
KAKINADA

**LINE ESTIMATE**

**Name of the Work :** Re erection of Dwajasthambham infront of Temple

**Name of the Temple: Sri Umaramalingeswara and Sri Subrahmanyeswara Swamy temple at Ramgampet (V),&(M),East Godavari Dist.**

Assistant Engineer,  
Endowmnts Department,  
Kakinada

**Deputy Executive Engineer,  
Endowmnts Department,  
Kakinada**

## **LINE ESTIMATE**

**Name of the Work** : Reconstruction of Navagrahmandapam

**Name of the Temple: Sri Umaramalingeswara and Sri Subrahmanyeswara Swamy temple at Ramgampet  
(V),&(M),East Godavari Dist.**

Assistant Engineer,  
Endowmnts Department,  
KAKINADA

*Cedemy Go* 4/8/24  
Deputy Executive Engineer,  
Endowmnts Department,  
KAKINADA

## LINE ESTIMATE

**Name of the Work** \_\_\_\_\_: Reconstruction of Kalyanamandapam

**Name of the Temple: Sri Umaramalingeswara and Sri Subrahmanyeswara Swamy temple at Ramgampet  
(V),&(M),East Godavari Dist.**

Assistant Engineer,  
Endowmnts Department,  
**KAKINADA**

Cedarm gro  
4/18/24  
Deputy Executive Engineer,  
Endowmnts Department,  
KAKINADA

### LINE ESTIMATE

Name of the Work : Re Construction of Compound wall allround the temple premises

**Name of the Temple:** Sri Parvathi Ramalingeswara Swamy temple at Ramavaram (V), Anaparthi (M), East Godavari District. .

*Lalaparch*

Assistant Engineer,  
Endowmnts Department,  
KAKINADA

~~Cleary Go~~ 113 T24

Deputy Executive Engineer  
Endowments Department,  
KAKINADA


## **LINE ESTIMATE**

**Name of the Work :** Providing Raising the Ground level and providing pradakshana chatta around the temple

**Name of the Temple: Sri Umaramalingeswara and Sri Subrahmanyaswamy temple at Ramgampet  
(V),&(M),East Godavari Dist.**

Assistant Engineer,  
Endowmnts Department,  
KAKINADA

**Deputy Executive Engineer,  
Endowmnts Department,  
KAKINADA**

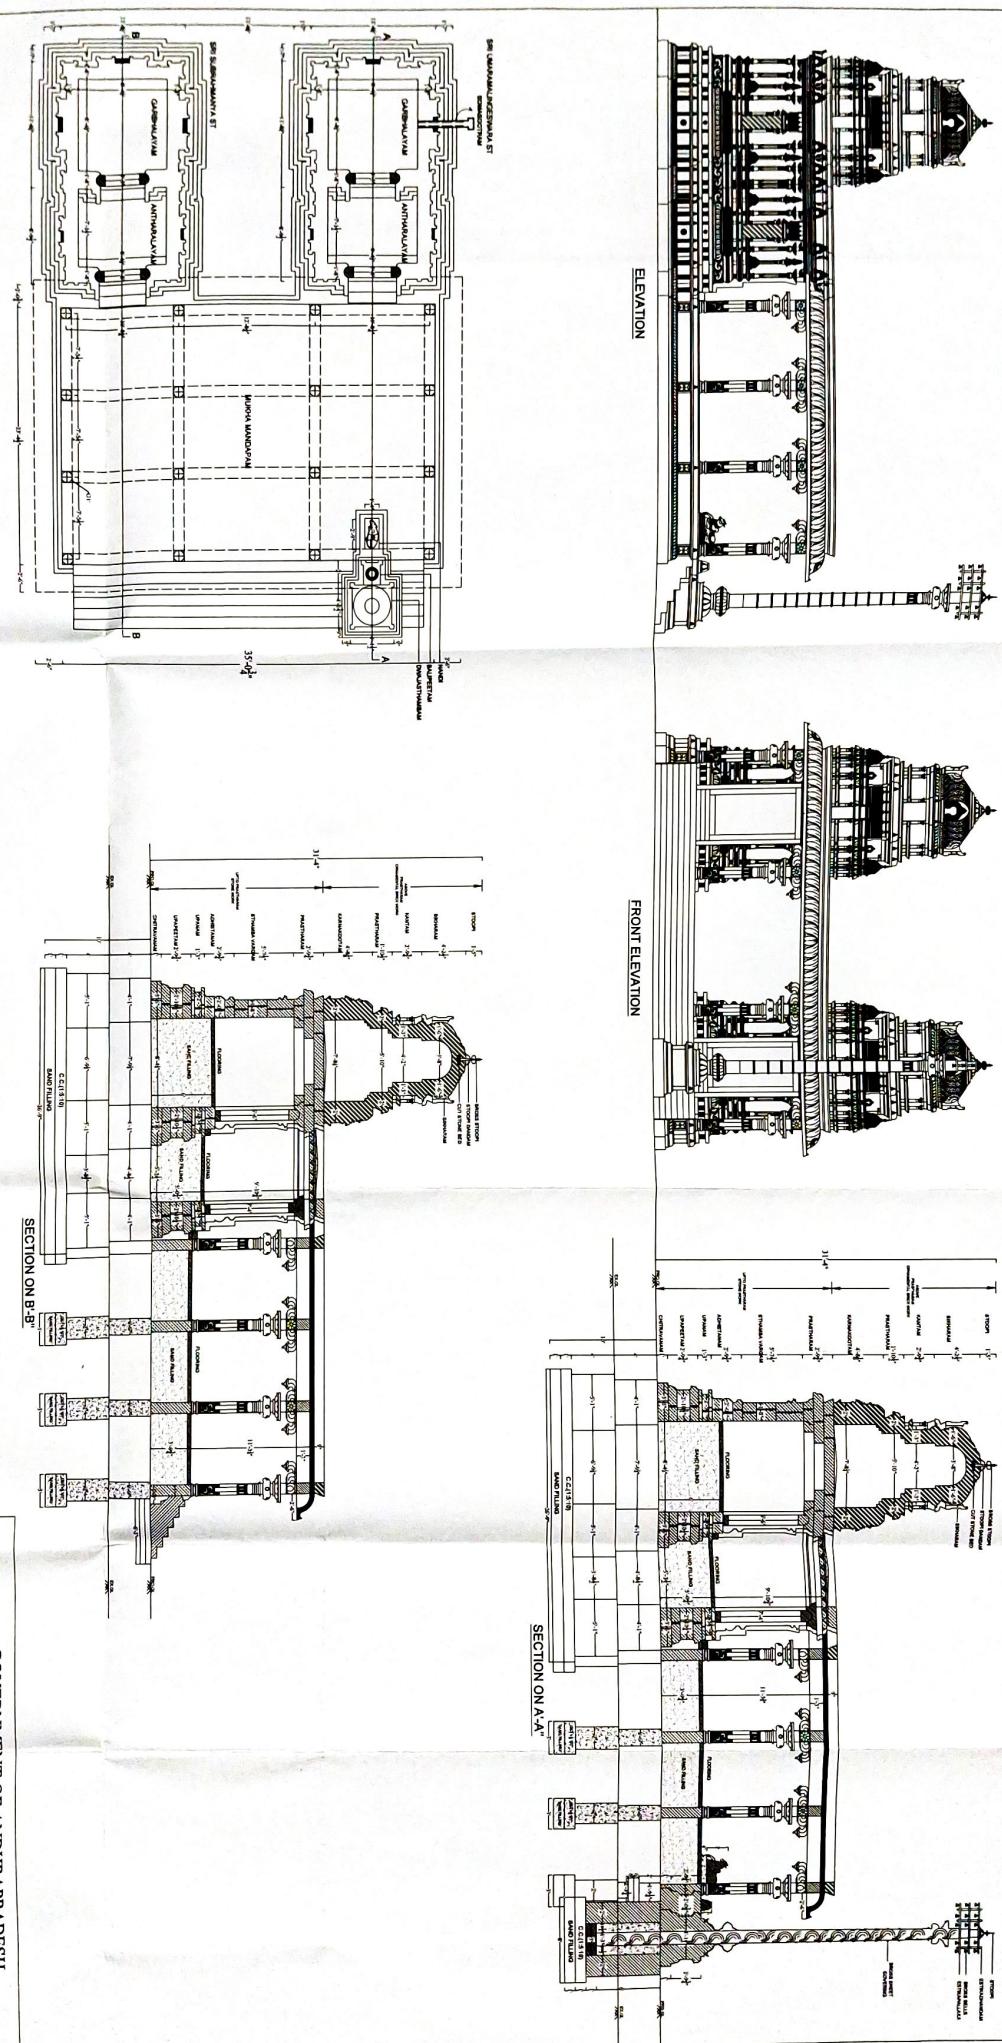


GOVERNMENT OF ANDHRA PRADESH  
ENDOWMENTS DEPARTMENT  
KAKINADA

PLAN SHOWING FOR PROPOSED RE-CONSTRUCTION OF  
SRI UMA RAMALINGESWARA & SUBRAHMANYASWAMY SWAMY  
TEMPLE AT RANGAMPETA (V&M), E.G.DIST

SCALE: 1:1

APOLLO			
RE-CONSTR.	ASST.ENGINEER	DEPUTY STTRATRY	BY EX.ENGINEER EXECUTIVE.ENGINEER

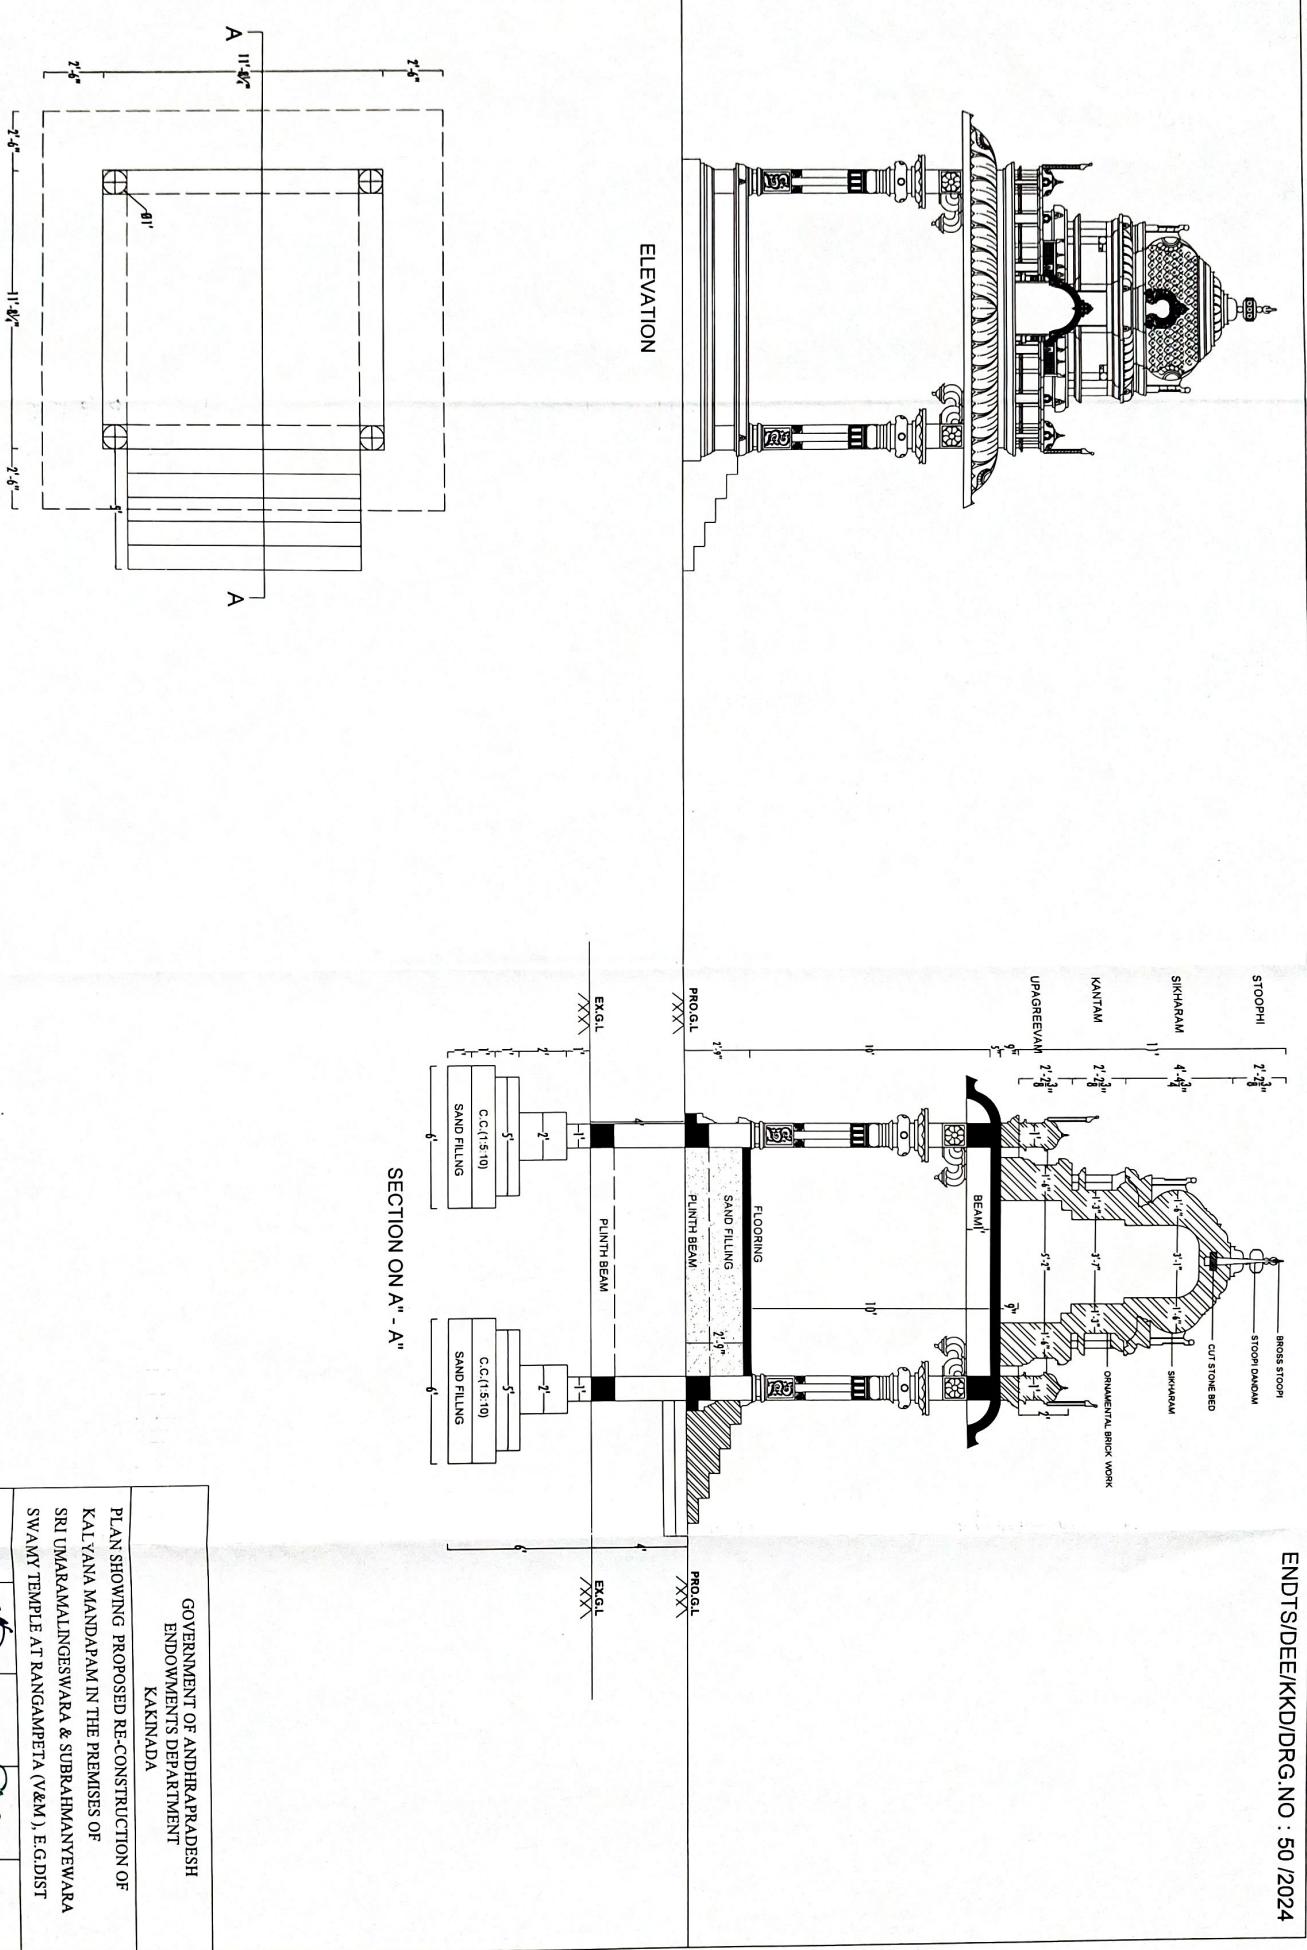

ENDTS/DEE/KKD/DRG.NO : 49 /2024

R.C.C.SLAB

- ROOF BEAM 1.0X1.0

GRANITE STONE IDOL  
PEETAM

- C.C.FLOORING

**PRO.GL**

110

EX.GL

三

11

This technical drawing illustrates the construction details of a granite stone idol placed on a peetam. The drawing is divided into two main sections: a side elevation view on the right and a plan view on the left.


**Side Elevation View:**

- The height of the entire structure is indicated as  $12' - 0\frac{1}{7}''$ .
- The top slab is labeled "VYALAM R.C.C.SLAB".
- The roof beam is labeled "ROOF BEAM 1.0X1.0".
- The peetam is labeled "GRANITE STONE IDOL PEETAM".
- The base is labeled "C.C.FLOORING".
- Dimensions for the plinth beam and sand filling are provided:  $2' 9'' \times 1' 3''$  and  $1' 3'' \times 1' 3''$  respectively.
- Thicknesses for the plinth beam and sand filling are given as  $6\frac{1}{2}''$  and  $5\frac{1}{2}''$  respectively.
- Vertical dimensions include  $8'$ ,  $2'$ ,  $2'$ ,  $1' 3''$ ,  $2'$ ,  $1' 3''$ , and  $1' 3''$ .
- Horizontal dimensions include  $8'$ ,  $2'$ ,  $2'$ ,  $1' 3''$ ,  $2'$ ,  $1' 3''$ , and  $1' 3''$ .
- Labels "PRO.GL" are placed at both ends of the structure.
- Labels "EX.GL" are placed at the bottom corners of the structure.
- Labels "PLINTH BEAM" and "SAND FILLING" are placed near the base of the structure.
- Labels "SINGLE REEMED PILE 1'-0"φ WITH ONE BULB" are placed at the bottom left.

**Plan View (Left):**

- The plan shows a rectangular base with a central column.
- Dimensions for the base are  $8'$  by  $8'$ .
- Labels "EX.GL" are placed at the top and bottom edges of the plan view.


## SECTION ON A'-A''

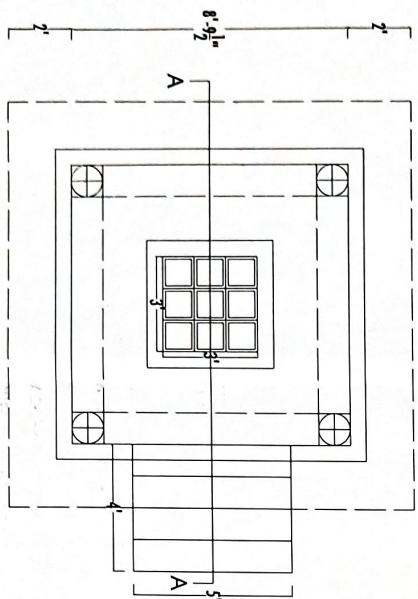

GROUND PLAN

**GOVERNMENT OF ANDHRA PRADESH  
ENDOWMENTS DEPARTMENT  
KAKINADA**

ENDTS/DEE/KKD/DRG.NO: 42 /2024

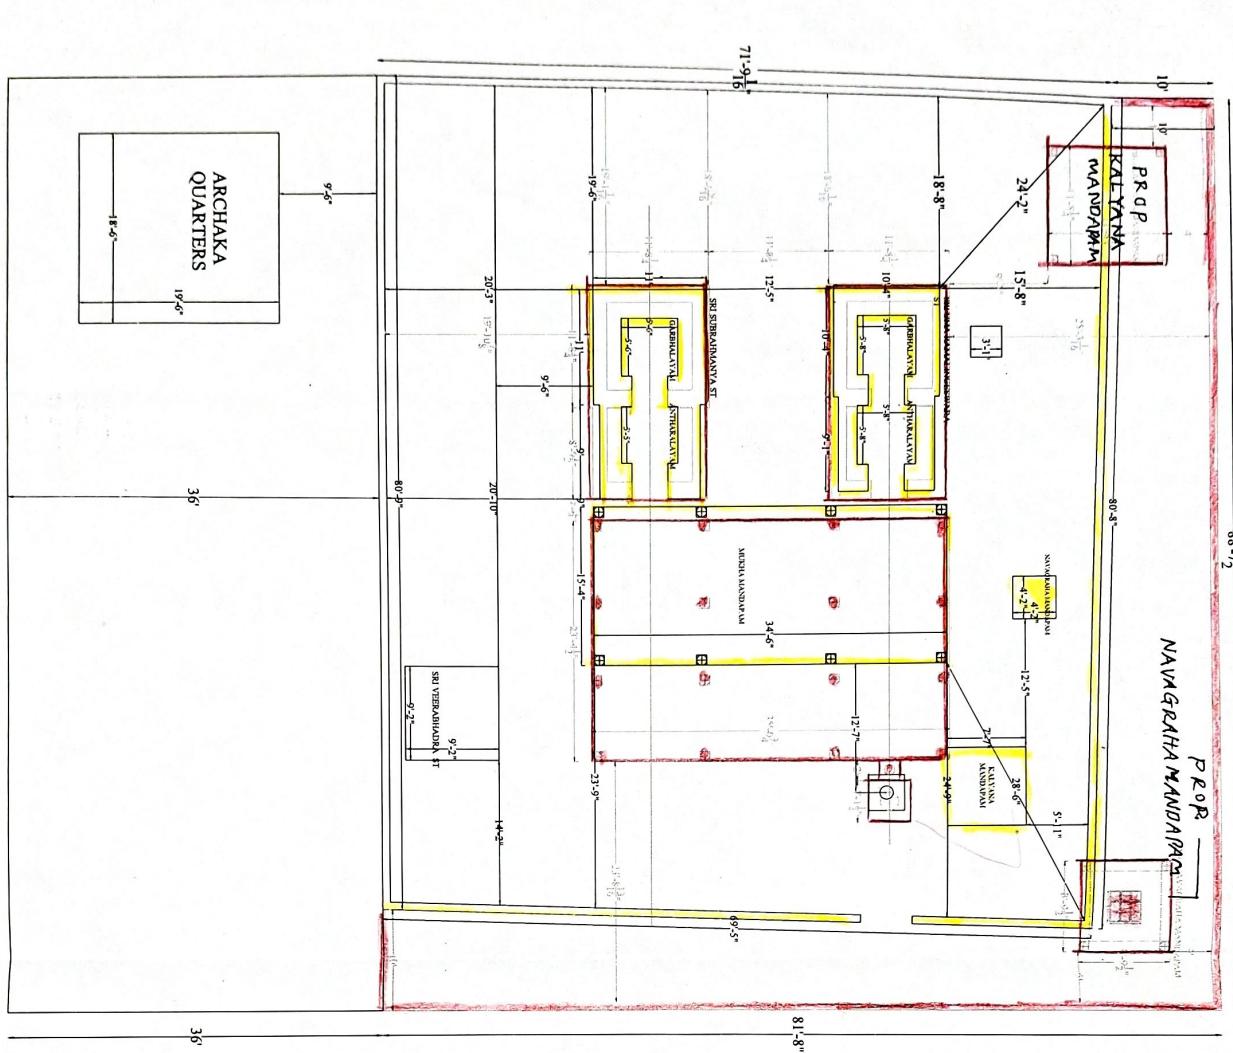

**GOVERNMENT OF ANDHRA PRADESH**  
**ENDOWMENTS DEPARTMENT**  
**KAKINADA**

SITE PLAN OF  
**SRI UMA RAMALINGESWARA & SUBRAHMANYESWARA SWAMY**  
**TEMPLE AT RANGAMPETTA (V & M), E.G.DIST**

SCALE : 1:1